


PL-S13W Compact Fluorescent Lamp (F13BX/CF13DS/CFT13)



Applications:

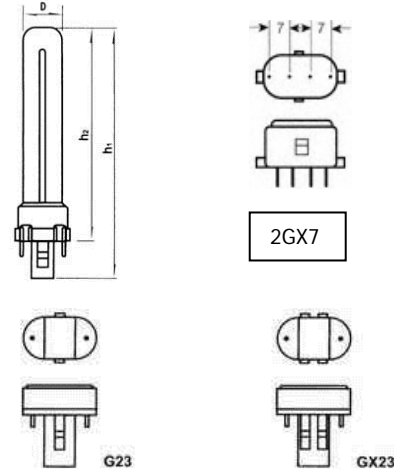

Ideal for:

Offices	Retail	Corridors/Stairwells	Lobbies/Atriums	Hotel Rooms
Airport/Train Stations		Coves/Valences	Building Facades	Work Stations
Walkways/Courtyards		Parking Garages	Conversion Kits	Screw Adapter

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions(mm)				Std. Pkg. CTN (pcs)
							d	h1	h2	D	
PL-S5W	5	250	82	2700	10000	G23	12	107	85	27	200(25x4)
PL-S7W	7	400	82			G23	12	137	115	27	200(25x4)
PL-S9W	9	580	82			G23	12	167	145	27	200(25x4)
PL-S13W	13	760	82	4200		GX23	12	172	166	27	200(25x4)
PL-S13W	13	760	82	6400		2G11	12	186	164	27	200(25x4)
PL-S13W	13	760	82			2GX7	12	186	164	27	200(25x4)

- Lamp life defined according to international standard
- Other than common color temperatures may need special order.