



FML(PL-F) Lamp

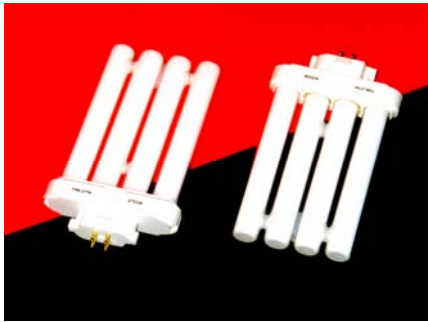


Features:

- Designed for operation on both electronic and magnetic ballasts.
- Combining a very compact size with a maximized lumen output enables more economical fixture spacing, meanwhile provide even light distribution
- Ideal solution for covering the applications of circular and D shaped lamps
- 75% saving on energy and long life for changing bulb much less frequently

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions(mm)				Std. Pkg. Qty.(pcs)
							D1	K	A	h1	
FML 18W	18	1200	82	2700K	10000	GX10q-3	17	78	113	128	50
FML 27W	27	1700	82	to		GX10q-4	17	78	128	143	
FML 36W	36	2600	82	6400K		GX10q-6	17	78	224	239	

Applications:

- Table lighting
- Touchier floor lighting
- Wall sconces
- One by one fixtures
- Backlighting

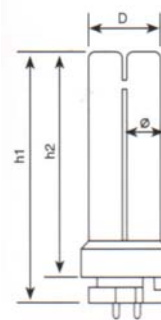

FDL(PL-BB) Lamp



Ideal for:

- Wherever economic, attractive lighting is required
- Professional and domestic use
- Public and living areas

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions(mm)				Std. Pkg. Qty.(pcs)
							D1	K	A	h1	
FDL 18W	18	1200	82	2700K	10000	GX10q-3 ↓	17	38	112	127	50
FDL 27W	27	1700	82	to		GX10q-4 ↓	17	38	127	142	
FDL 36W	36	2600	82	6400K		Or GX32	17	38	223	238	

- Lamp life defined according to international standard