


1362 West 53<sup>rd</sup> Avenue, Vancouver, British Columbia, Canada, V6P 1K9  
 E-mail: [sales@yfsinternational.com](mailto:sales@yfsinternational.com) Tel: (604) 321-6582 Fax: (604) 321-6592



## PL-L40W (4 pins) Compact Fluorescent Lamp

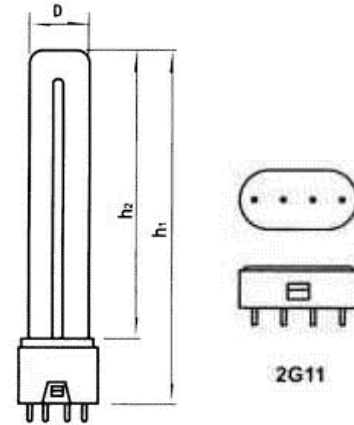

### Features:

- The 4-pin base allows for operation on rapid start, electronic and dimming circuits
- Designed for working on both electronic and magnetic ballasts.
- Excellent lumen efficacy while in half length but giving the same lumen as the traditional fluorescent tube
- Particularly well suited to commercial interior lighting application

### Applications:



### Ideal for:

Offices	Retail	Corridors/Stairwells	Lobbies/Atriums	Hotel Rooms
Airport/Train Stations		Coves/Valences	Building Facades	Work Stations
Walkways/Courtyards		Parking Garages	Conversion Kits	Screw Adapter

Type	Nominal Watt(W)	Luminous Flux(Lm)	Rendering index(Ra)	Color Temp.(K)	Rated Ave. life(h)	Lamp Base	Dimensions (mm)				Std. Pkg. CTN (pcs)
							d	h1	h2	D	
PL-L18W	18	1200	82	2700 ↓	10000	2G11	17	217	195	38	50
PL-L24W	24	1700	82	3500 ↓		2G11	17	317	295	38	
PL-L36W	36	2700	82	4200 ↓		2G11	17	411	379	38	
PL-L40W	40	3100	82	5000 ↓		2G11	17	533	501	38	
PL-L55W	55	4100	82	6400		2G11	17	533	501	38	

- Lamp life defined according to international standard
- Other than common color temperatures may need special order.